



40GBASE–SR4 QSFP+ Optical Engine Preliminary

Features:

High-speed and high-performance Data Communication applications
Fiber Channel Networking/Storage applications

Applications:

40GBASE SR4 QSFP+ Transceiver and Active Optical Cable

Specifications:

Absolute Maximum Ratings

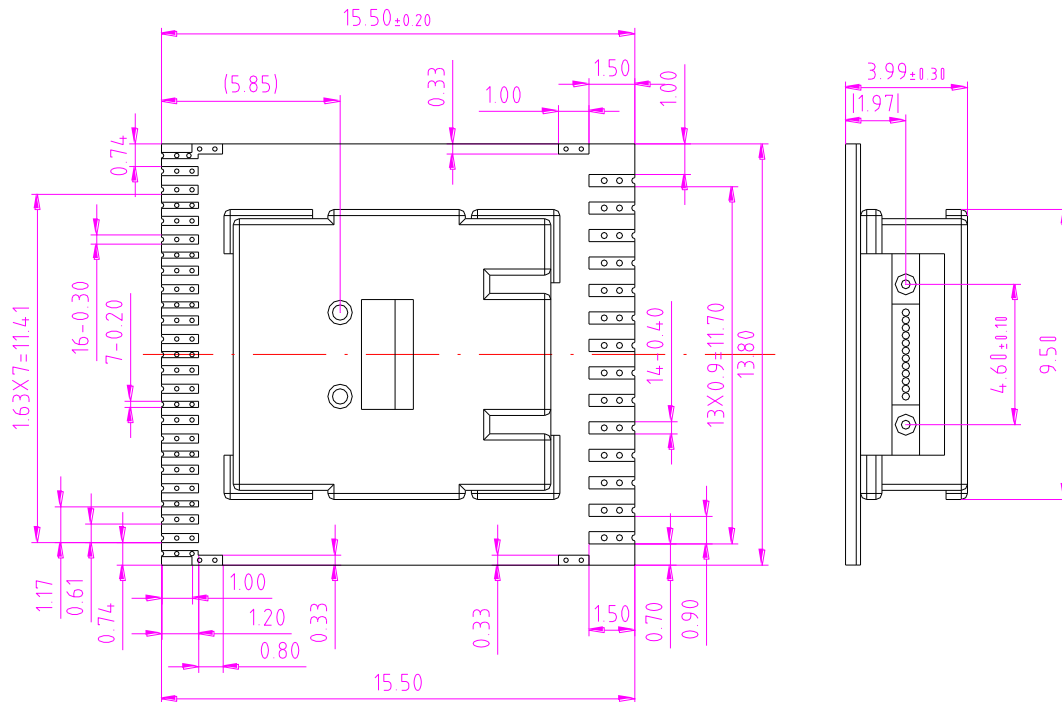
Parameter	Symbol	Min	Max.	Unit
LD Reverse Voltage	$V_{r(LD)}$	--	5	V
LD Forward Current	$I_{f(LD)}$	--	12	mA
Operating Temperature	T_{op}	-0	70	
Storage Temperature	T_{stg}	-40	85	
Lead Solder Temperature	--	--	260	
Lead Soldering Time	--	--	2	s

Transmitter Optical & Electrical Characteristics (T=25°C)

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
-----------	--------	----------------	-----	-----	-----	------

**Receiver Optical/Electrical Characteristics**

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Damage threshold	--		3.4	--	--	dBm
Average power at receiver input, each lane		10.3125Gbps, PRBS31, BER=1*E-12 , ER=4.5dB, Output Differential Voltage = Min.290mV	-9.5	--	2.4	dBm
Optical Return Loss	ORL	--	--	--	-12	dB
Optical Modulation Amplitude (OMA), each lane	--	--	--	--	3	dBm
Peak Power, each lane	--	--	--	--	4	dBm

Outline Dimension(mm) :



Electrical IO Assignment:

Optical IO Assignment:

Top View

Front View

Pin Number	Pin Name	Description
1	DOUT4N	Differential high-speed Data Output pads, P is the positive (non- inverted) node and N is the negative (inverted) node.
2	DOUT4P	
3	DOUT3N	
4	DOUT3P	
5	DOUT2N	
6	DOUT2P	
7	DOUT1N	
8	DOUT1P	
9	DIN1P	Differential high- speed Data Input pin P is the positive (non- inverted) node and N is the negative (inverted) node. The positive (non- inverted) node and pin N is the negative (inverted) node.
10	DIN1N	
11	DIN2P	
12	DIN2N	
13	DIN3P	
14	DIN3N	
15	DIN4P	
16	DIN4N	



21	LDIS	<p>The Laser Disable pin (LDIS) is a global output disable signal that will set Iavg and Imod to 0 when it is high, regardless of other settings.</p> <p>The pin can be left unconnected and the device will operate normally. The state of the pin may be read through the management interface.</p>
22	VCCT	Positive supply of driver stages and VCSEL anodes
23	GNDT	Negative supply, substrate
24	GNDR	Negative supply, substrate
25		
26	VCCR	Positive supply of TIA stage and Limiting amplifier stage
27	RSSI	<p>The Receiver Signal Strength Indicator output (RSSI) pad is an analog output that sources a current proportional to the average photo-detector current on the selected channels. The output is used during manufacturing for active alignment.</p> <p>As well, the output can be configured to produce a temperature proportional output.</p>
28	NOTINTR	<p>The active- low Interrupt (NOTINT) signals notifies the microcontroller about signal detect events such as signal detect and loss of signal when the events are unmasked.</p> <p>In systems using polling-based firmware, this input may be left unconnected.</p>
29	SCLR	The Serial Clock pad (SCL) is the clock input signal of the serial interface. The pad can be tied to VDD of 3.3V or 2.5V via a resistor. The SCL input is I ² C-bus compatible and operates at up to 1000kHz. If the serial interface is unused, this pad should be left unconnected.
30	SDAR	The Serial Data pad (SDA) is a bidirectional pad for the serial data signal. The pad can be tied to VDD of 3.3V or 2.5V via a resistor. The SDA pad is I ² C-bus compatible and operates at up to 1000kHz. If the serial interface is unused, this pad should be left unconnected.



31	GNDR	Negative supply, substrate
32		
33		
34		
35		
36	GNDT	Negative supply, substrate
37		
38		
39		
40		
41		

Order Information:

40GBASE-SR4 QSFP+ Optical Engine Preliminary

Statement:

SAN-U owns the authority for final explanation of all information contained in this document, which is subject to change without notice. All the information was obtained in particular environments; and SAN-U will not be responsible for the performance of the

reference and shall not be considered as warranted characteristics. SAN-U will not be liable for damages arising directly or indirectly which from any use of the information contained in this document.

Contact Information:

Address: N501-505 Weiye Bldg., Xiamen Pioneering Park For Overseas Chinese Scholars, Xiamen, Fujian, China

Tel: +86-592-3898601, 3898608, 5318000

Fax: +86-592-5703588

Email: sales@san-u.com

<http://www.san-u.com>